



PH1800 MPK Plus Series High Frequency On/Off Grid Hybrid Solar Inverter


Feature:

- Pure sine wave output
- On/off grid inverter with energy storage
- Multiple operations: On-Grid, Off-Grid, Grid-Tie with Battery Back-up also recognized as Grid-Interactive
- Built-in MPPT solar charge controller
- Selectable input voltage range for home appliances and personal computers
- Selectable charging current based on applications
- Configurable AC/Solar input priority via LCD setting
- Compatible to mains voltage or generator power
- Auto restart while AC is recovering
- Smart battery charger design to optimize battery performance
- Cold start function
- Parallel operation with up to 3 units (Available for MUST PH18-4K/5K MPK Plus)
- Optional Remote Control Panel available

Introduction:

This is a multi-function inverter/charger, combining functions of inverter, MPPT solar charger and battery charger to offer uninterruptible power support with portable size. Its comprehensive LCD display offers user-configurable and easy-accessible button operation such as battery charging current, AC/solar charger priority, and acceptable input voltage based on different applications.


LCD Display Information

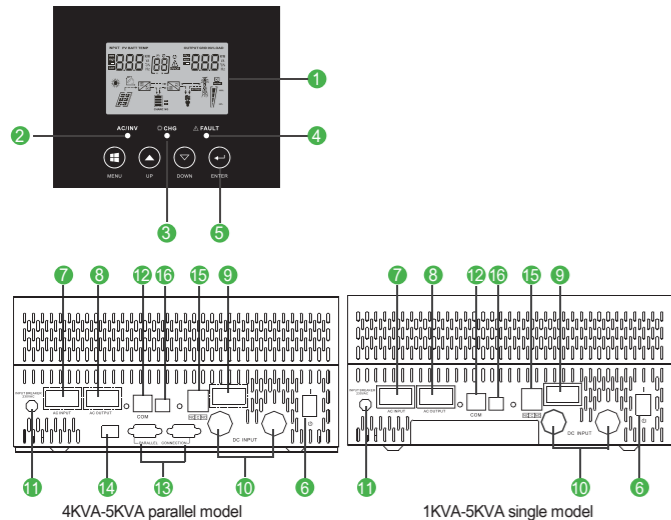

1. LCD display
2. Status indicator
3. Charging indicator
4. Fault indicator
5. Function buttons
6. Power on/off switch
7. AC input
8. AC output
9. PV input
10. Battery input
11. Circuit breaker
12. RS485 communication port
13. Parallel communication cable (only for parallel model)
14. Parallel switch
15. Dry contact
16. USB

NOTE: For parallel model installation and operation, please check separate parallel installation guide for the details.

Solar System Connection

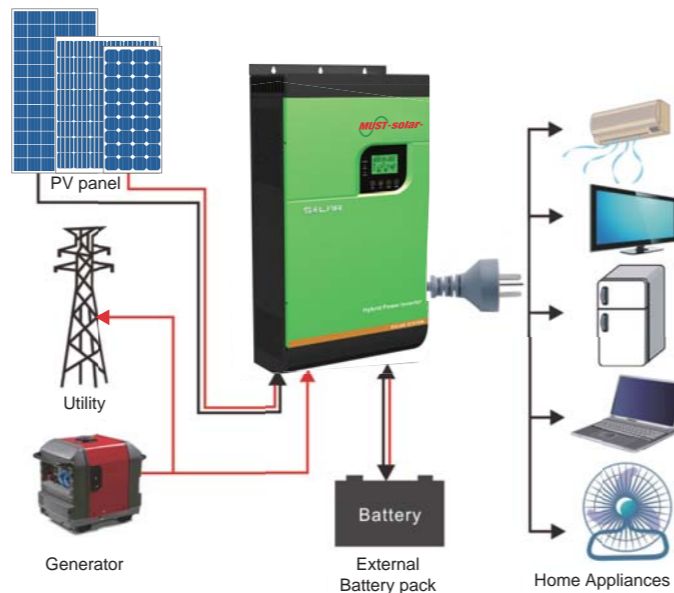

Back Panel



Specification

MODEL	PH18-1K MPK Plus	PH18-2K MPK Plus	PH18-3K MPK Plus	PH18-4K MPK Plus	PH18-5K MPK Plus	
Default Battery System Voltage	24VDC			48VDC		
INVERTER OUTPUT	Rated Power	1000VA/800W	2000VA/1600W	3000VA/2400W	4000VA/3200W	5000VA/4000W
	Surge Power	2000VA	4000VA	6000VA	8000VA	10000VA
	Waveform	Pure sine wave				
	AC Voltage Regulation (Batt.Mode)	230VAC±5%				
	Electric current	3.4A	7.0A	10.5A	13.0A	
	Output frequency precision	50Hz±0.1%				
	THD (Linear loads)	Off grids≤2%				
		Grid discharge ≤3%				
		Grid charge ≤3%				
	Inverter Efficiency (Peak)	90%	93%			
Transfer Time	10ms(FST- APL); 20ms(SLO)					
AC INPUT	Voltage					
	230VAC					
	Selectable Voltage Range	170~280VAC(FST); 90~280VAC(SLO);184-253VAC(APL)				
Frequency Range	50Hz/60Hz (Auto sensing)					
BATTERY	Nominal voltage			48VDC		
	Floating Charge Voltage			54VDC		
	Overcharge Protection			60VDC		
SOLAR CHARGER & AC CHARGER	Maximum PV Array Open Circuit Voltage			145VDC		
	PV Array MPPT Voltage Range			30~130VDC		64~130VDC
	Standby Power Consumption			2W		
	Rated Power			1500W		3000W
	Maximum Solar Charge Current			60A		
	Maximum Efficiency			98%		
MECHANICAL SPECIFICATIONS	Maximum AC Charge Current			60A		
	Maximum Charge Current			60A		120A
	Dimension,W*H*D(mm)	272*372*131			295*528*141	
Net Weight(kg)	7.4	7.6	8.0	12.5	13.5	
OTHER	Humidity					
	5% to 95% Relative Humidity (Non-condensing)					
	Operating Temperature			0°C -55°C		
Storage Temperature			-15°C -60°C			

* Product specifications are subject to change without further notice.

Approximate Back-up Time Table

Model	Load (VA)	Backup Time@24V 100Ah(min)	Backup Time@24V 200Ah(min)	Model	Load (VA)	Backup Time@48V 100Ah(min)	Backup Time@48V 200Ah(min)
1KVA	200	766	1610	1KVA	100	2529	5058
	600	198	503		500	482	1035
	1000	112	269		1000	186	471
2KVA	200	766	1610	2KVA	200	1581	3161
	1000	112	269		1000	268	615
	2000	50	112		2000	106	257
3KVA	300	449	1100	3KVA	300	1054	2107
	1500	68	164		1500	159	402
	3000	28	67		3000	63	155
4KVA	400	766	1610	4KVA	400	766	1610
	2000	112	269		2000	112	269
	4000	50	112		4000	50	112
5KVA	500	613	1288	5KVA	500	613	1288
	2500	90	215		2500	90	215
	5000	40	90		5000	40	90